


# OSMOSEAL FOUNDATION


WATERPROOFING OSMOTIC CEMENT FOR EXTERNAL AND INTERNAL WATERPROOFING OF CONCRETE FOUNDATION STRUCTURES



CHARACTERISTICS		ENVIRONMENTAL		METHOD OF USE		PRECAUTIONS
IMPERMEABILE	TRASPIRANTE	ECO GREEN	RECYCLABLE	MIX MECHANICALLY	APPLY BY ROLLER	STORAGE: IN A DRY PLACE

## PROBLEM

### WATERPROOFING UNDERGROUND SPACES

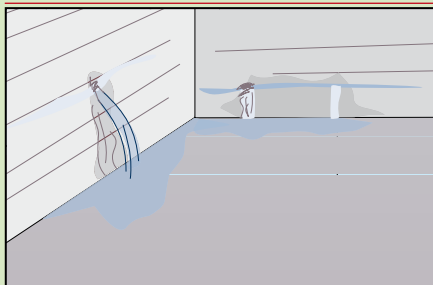

Water from infiltrations, unconfined aquifer or normal humidity formed in the land where the foundations lay is the main source of degradation and thus unaccessibly to underground or partially underground spaces. In addition to the high humidity rate that makes the spaces unusable, the salts dissolved in the water cause the plaster to detach. In the most serious cases, in the presence of unconfined aquifer, the water pushed by hydrostatic pressure tends to reach the same external level inside of the space, through cracks or empty capillaries.

## SOLUTION

The lack of suitable waterproofing or defects in the same, in addition to causing significant damage, always makes subsequent curative treatments difficult and expensive. Therefore, it is fundamental to prevent and protect the structures from possible water penetration with a waterproof cement coating particularly resistant to aggressive agents, impacts and abrasions during backfilling.

**OSMOSEAL FOUNDATION** is a premix in powder form, based on high-strength hydraulic binders, water-repellent additives, powdered resins and selected aggregates. It comes as a powder for mixing with water at the time of use.

**OSMOSEAL FOUNDATION** is reactive with respect to calcium hydroxide, forming stable and insoluble compounds.



## APPLICATION FIELDS

It is used to externally waterproof with a positive thrust the concrete foundation structures, under aquifer subject to infiltrations. **OSMOSEAL FOUNDATION** is also used as waterproofing coating for the masonry in contact with the soil affected by penetrating damp.

## ADVANTAGES

- The ease of application makes the intervention inexpensive and quick.
- High penetration and adhesion to the support.
- It keeps the permeability to water vapour.
- High resistance to pressurised water.

## METHOD OF USE

### • SURFACE PREPARATION

It is fundamental to suitably prepare the concrete surfaces to be waterproofed by removing any old plaster and damaged and crumbling parts via chipping.

The support is cleaned of oils, mortar, release agents, dust and efflorescence through water or sand washing treatments in order to obtain a clean and compact support.

Any seepage which occurs is blocked in advance with **BETONRAPID** quick-setting hydraulic cement. Transudation and percolation are previously blocked by adding **OSMOSEAL FOUNDATION** to **BETONRAPID** for quick-setting.

The concrete structure will be regularised with **RESISTO** shrinking-compensating mortar.

The spacers of the shuttering protruding from the wall must be cut and nipped inside a cavity (possibly dovetailed) and filled.

The angles between the floor and walls must be rounded via shelling with **RESISTO** mortar after

uncasing to improve bonding.

**Special care must be taken when wetting the concrete support in order to create the conditions for OSMOSEAL FOUNDATION to absorb all the water needed for the osmotic process and for the hardening chemical reactions.**

**Thus it is fundamental to wet the support carefully several times until saturation.**

**Excess water in the form of a surface layer must be removed with a sponge.**

### • MIX PREPARATION

To prepare the mix, gradually pour **OSMOSEAL FOUNDATION**, avoiding the formation of lumps, in a sufficient quantity of water (20%) to obtain a brushable mortar of the consistency of honey by using a drill at low speed.

The mixture ratio is 5 litres of water for each 25 kg package of **OSMOSEAL FOUNDATION**. The average consumption is 3 kg/m<sup>2</sup> applied in two coats.

For smooth or particularly difficult surfaces, in order to improve the bonding to the support, we ad-

vised preparing a 1.5 kg mix of **LATICRYL** adhesive latex +3.5 litres of water separately and then add, always while stirring, **OSMOSEAL FOUNDATION** in the quantity of a 25 kg bag.

### • APPLICATION

Remix **OSMOSEAL** mortar to a honey-like consistency during use without adding water, and apply within an hour of preparation, working from top to bottom, starting with the walls and finishing with the floor.

**OSMOSEAL FOUNDATION** mortar should be applied with a Tampico fibre brush or sprayed with suitable equipment.

Spread a first coat on the substrate so as to achieve a uniform covering layer, then apply the second coat on top of the first as it hardens, following the same procedure.

### • COVERAGE

About 3 kg/m<sup>2</sup> with two coats.

(See following)

## TECHNICAL CHARACTERISTICS

	Standard	OSMOSEAL FOUNDATION
Class and type	EN 1504-2	class C PI-MC-IR
Appearance		Powder
Colour		Grey - Red
Maximum granulometry		0.8 mm
Apparent volume mass		1.30 ± 0.05 kg/L
Mixing water		20%
Apparent volume mass of the mix	EN 1015-6	1.70 ± 0.05 kg/L
pH mix		about 12
Application temperature		+5 ÷ +35
Minimum application thickness		1 mm
Maximum application thickness		3 mm
Resistance to compression	EN 12190	45 MPa
Resistance to bending	EN 196/1	7 MPa
Bonded link	EN 1542	>2 MPa
Permeability to water vapour	EN 7783-1	class I SD<1 m (permeable)
Capillary absorption and permeability to water	EN 1062-3	W<0.1 kg/m <sup>2</sup> ·h <sup>0.50</sup>
Impermeability to water	EN 14891	impermeable (>500 KPa)
Workable mix duration at +20°C (*)		60 minutes
Thermal resistance		-30°C ÷ +90°C
Reaction-to-fire Euroclass	EN 13501-1	A1
Storage in original packaging in a dry place		12 months

Test conditions: temperature 23±2°C, 50±5% U.R. and air speed in the test area <0.2 m/s.

(\*) The stated times are longer or shorter as the temperature decreases or increases.

In compliance with the general principles defined in EN 1504-2 - General principles for the use of products and systems.

(See previous)

### • APPLICATION WARNINGS

- Use cold water in the summer and at 20°C in the winter.
- Application Temperature from +5°C to +35°C.
- During the summer and on windy days, it

is necessary to pay particular attention to keeping the waterproofed surfaces suitably wet with nebulised water in order to avoid rapid dehydration.

- Do not apply on supports subject to structural or settling movements.
- A useful precaution is to wait 48 hours before loading the finished waterproofing.

- Store in a dry place closed in the original packaging.

## REFERENCES



Subways - Verona



Subways - Verona



New Jersey - Val d'Ega

## PACKAGING

**OSMOSEAL FOUNDATION**

- 25-kg-bucket

• FOR ANY FURTHER INFORMATION OR ADVICE ON PARTICULAR APPLICATIONS, CONTACT OUR TECHNICAL OFFICE • IN ORDER TO CORRECTLY USE OUR PRODUCTS, REFER TO INDEX TECHNICAL SPECIFICATIONS •

**index**  
Construction Systems and Products

Via G. Rossini, 22 - 37060 Castel D'Azzano (VR) - Italy - C.P.67  
Tel. (+39)045.8546201 - Fax (+39)045.518390

Internet: [www.index-spa.com](http://www.index-spa.com)  
Informazioni Tecniche Commerciali  
[tecom@indexspa.it](mailto:tecom@indexspa.it)  
Amministrazione e Segreteria  
[index@indexspa.it](mailto:index@indexspa.it)  
Index Export Dept.  
[index.export@indexspa.it](mailto:index.export@indexspa.it)



The numerous possible uses and the possible interference of conditions or elements beyond our control, we assume no responsibility regarding the results which are obtained. The purchasers, of their own accord and under their own responsibility, must establish the suitability of the product for the envisaged use.

The figures shown are average indicative figures relevant to current production and may be changed or updated by INDEX at any time without previous warning. The advice and technical information provided, is what results from our best knowledge regarding the properties and the use of the product. Considering